


Before removing old fluorescent or LED lamps, shut off power to the light.

* Retrofitting should be done by a qualified installer who will follow all relevant building and electrical codes.






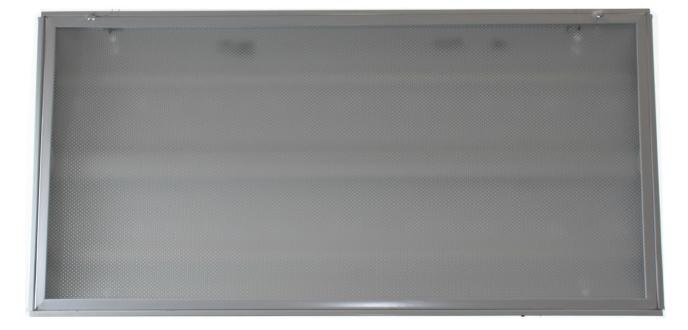

Remove lens.

BLUBARS[™] Retrofit System

Retrofitting **TROFFERS**

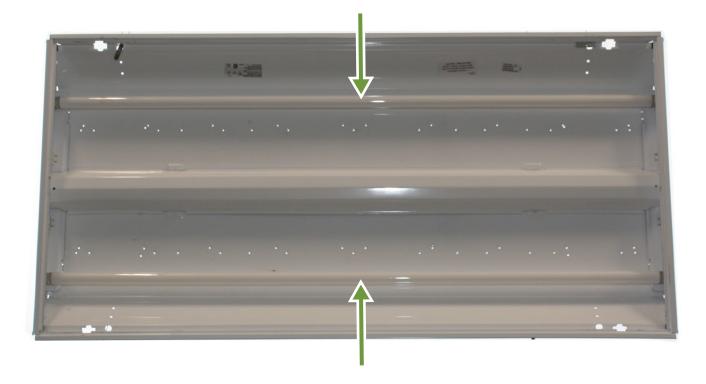


Remove lamps.





Remove ballast cover.



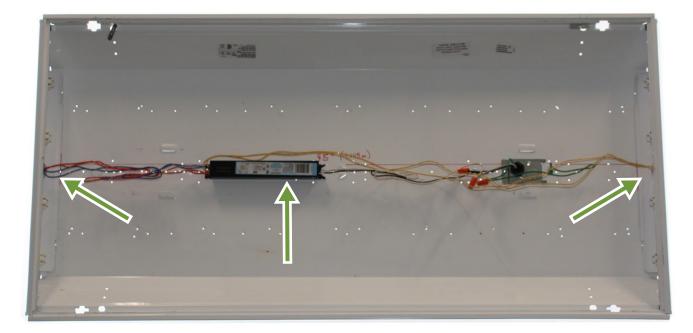

Disconnect power wires and carefully remove old ballast and sockets.


BLUBARS[™] Retrofit System

Retrofitting **TROFFERS**




Housing is ready for the installation of the BLUDRiVe [™] BD35.



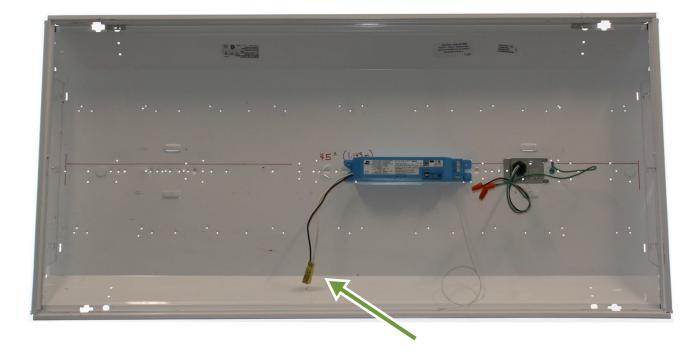


Splice building power through the disconnect provided.



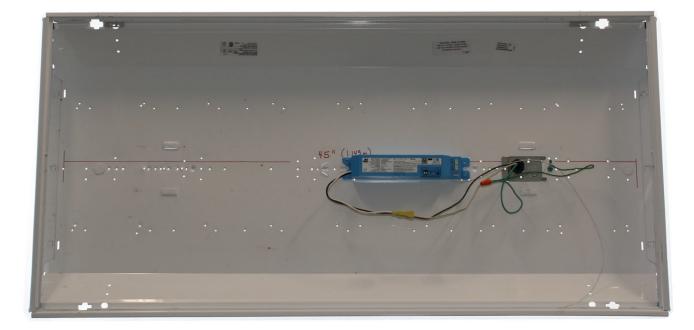

Choose between 750mA (35W), 600mA (28W), or 450mA (21W) using the power settings switch.




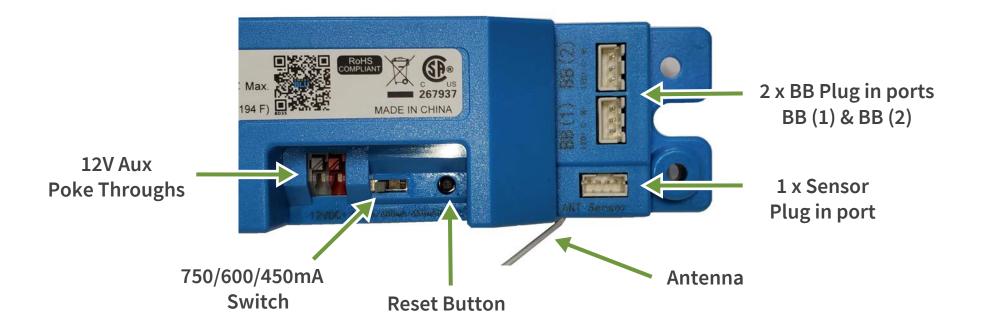

Overview of BLU DRiVe[™] features.



Opposite end of cable plugs into BB (1) port

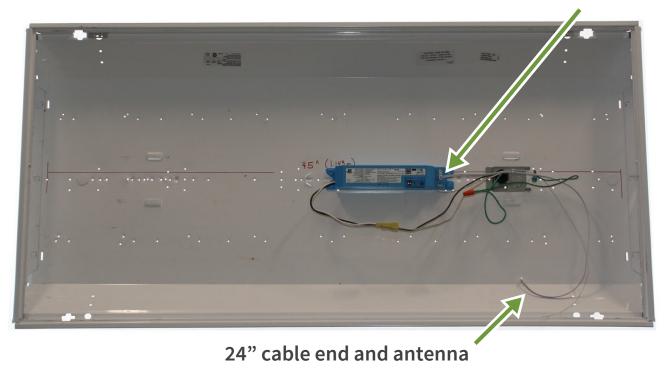

Plug 24 inch BLU BaRS[™] cable into the BLU DRiVe[™] BB (1) port and leave opposite end out of ballast cover for connection to BLU BaR[™]. Leave 3 inches of Antenna outside of ballast cover.





BB cable and Antenna are left outside of ballast cover

You are now ready to connect the first BLU BaR[™].



15 inch BB connector end



First BLU BaR™

Plug 15 inch cable provided into one end of first BLU BaR[™] then plug opposite end into the 24 inch cable that is left outside of the ballast cover. Center BLU BaR[™] on the side of fixture using magnets provided.



Second BLU BaR™

Tuck excess connector cable into the housing and leave 3 inches of antenna out


Plug 15 inch cable provided into one end of first BLU BaR[™] then center BLU BaR[™] on the other side of fixture using magnets provided. use a portable drill with Philips head to drill one tek screw (provided with BLU BaRs[™]) into both sides of each BLU BaR[™].





Clean and replace lens. You are now ready to energize! The BLU BaRs[™] will express the default color and power settings.



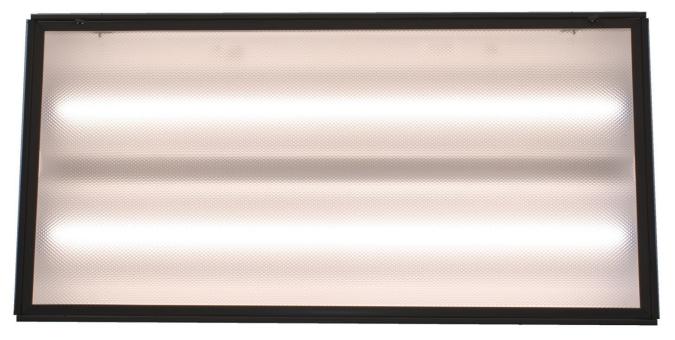


After energizing you may connect and program using the SMART BLU[™] App. See **www.smartblu.com** for more information.







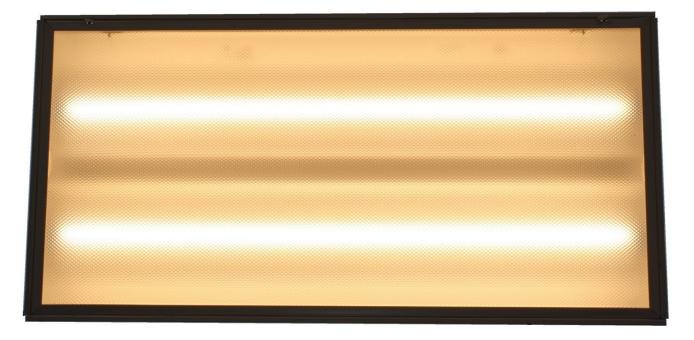


Using the SMART BLU[™] app, you may adjust color from 2700K...







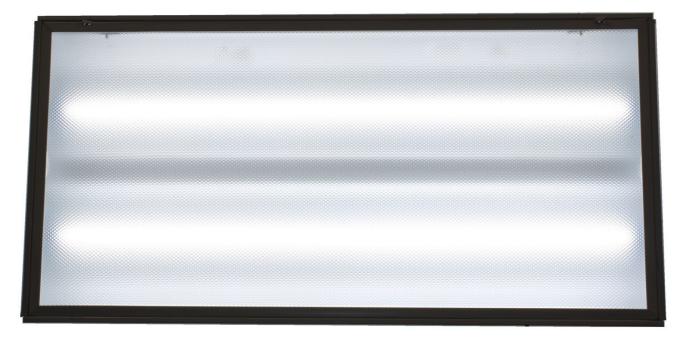


...to 6500K and any color in between.







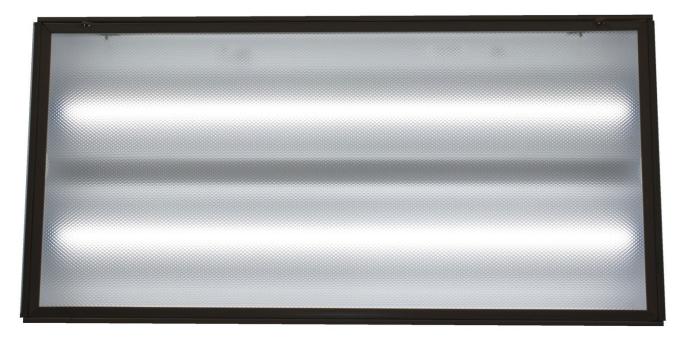

Easily dim your BLU BaRs™









You can dim your BLU BaRs[™] from 100% down to 1% and anywhere in between.

Download the SMART BLU™ App



